

THERMIKOAT COOL ROOF

Waterproofing and ultra-reflective, stagnation-resistant and cold-flexible coating

Single-component water-based ultra-reflective waterproofing and protective coating for exteriors formulated with special structured elastomeric resins and enriched with nanotechnological aggregates with a high solar reflection index. Ready to use, resistant to stagnation and flexible at low temperatures. It guarantees the reflection of the sun's rays, decreasing the temperature of the substrate on which it is applied, favouring considerable energy savings in air conditioning, and increasing the efficiency of photovoltaic panels.

BENEFITS

- Special formula combining high solar reflectivity, stagnation resistance and cold flexibility.
- It contributes to the reduction of energy requirements for summer air conditioning, promoting energy savings and lowering the level of pollution in cities.
- In unconditioned buildings, it increases indoor summer comfort.
- Reduced roof surface temperature and diffuse light increase the efficiency of photovoltaic panels.
- Reduces the urban *Heat Island Effect*.
- High resistance to weather, UV and salt air.
- Can be applied over bituminous and slated membranes in good condition.
- Easy and quick application.
- *Solvent free* product.
- Product certified with European Technical Assessment - **ETA no. 23/0574**.

YIELD

2.0 kg/m²

COLOUR

White.

PACKAGING

20 kg plastic buckets.

Pallets:

- 20 kg bucket - 48 buckets (720 kg).

FIELDS OF APPLICATION

Product designed for waterproofing and protective coating of flat or pitched roofs; horizontal, vertical or sloping surfaces. *Thermikoat Cool Roof* can be used on numerous substrates such as bituminous or slated membranes in good condition, concrete surfaces, wood, galvanized sheet metal, polyurethane foam panels. Product suitable for outdoor use.

STORAGE

The product must be stored in its original tightly closed containers, in a well-ventilated place, away from sunlight, water and frost, at temperatures between +5°C and +35°C. Storage time 12 months.

SUBSTRATE PREPARATION

The substrate must be fully cured, dry and have sufficient strength.



DIASEN SRL UNIPERSONALE - Società Benefit

Zona Industriale Berbentina 5 - 60041 Sassoferrato (AN) | Italia | +39 0732 9718
 diasen@diasen.com | www.diasen.com | P.IVA 01553210426 | R.E.A. Ancona n. 150933
 Reg. Imp. Ancona 01553210426 | Cap. Soc. €400.000,00 i.v.

THERMIKOAT COOL ROOF

Waterproofing and ultra-reflective, stagnation-resistant and cold-flexible coating

The surface must be thoroughly clean, dry, and free of oils, grease, crumbly and inconsistent parts, or other materials that may affect the adhesion of the product.

In cases where the surface is crumbly overall, totally scarify it until a good substrate is obtained and restore the lesions or degraded parts with suitable mortar. Ensure that the substrate has the right slopes for proper rainwater runoff.

Moisture that may be present in the substrate and vapor that forms as a result of irradiation can affect the adhesion of applied products. In the case of hydro-cleaning, wait until the substrate is completely dry.

Thermikoat Cool Roof adheres to various types of substrates without the need for a primer; however, it is recommended that a preliminary test be carried out to check adhesion and the possible need to use a primer.

Concrete

In the case of newly made concrete base, this must be sufficiently cured and have completed adequate shrinkage. In the case of deteriorated and friable concrete, provide restoration with appropriate restoration mortar. In case of smooth concrete, on non-wet substrates use *Grip Primer* (see technical data sheet).

On damp substrates, in order to avoid blistering or detachment phenomena, use *Vapostop* (see data sheet) as primer. If the *substrate* is subject to rising damp, the use of *WATstop* (see data sheet) is necessary. *WATstop* can also be used to fill small cracks or crazing. On rough concrete, use *Vapostop* primer (see data sheet).

Bituminous or slated sheathing

Ensure that the sheath has been applied for at least 6 months to prevent detachment caused by oil release.

Ensure that overlaps are well adhered, in case of detachments, reinforce them with hot systems. Restore any cuts or holes, if present. Clean the sheath thoroughly, removing any

paint or protective layers that are not well adhered.

Provide for the installation of ventilation holes in the sheath, suitably positioned according to the humidity of the substrate. This is essential in the presence of very absorbent substrates that retain moisture, such as screeds lightened with polystyrene or expanded clay. All sheaths, whether worn or treated with paint that is well bonded to the substrate, must be primed with *SBS-bond* primer (see technical data sheet).

In case of damaged sheathing, restore it with the sandwich system (*Thermikoat Cool Roof + Polites TNT + Thermikoat Cool Roof*) after priming the surface.

The sandwich system should be used at overlaps and points where the sheath is most stressed.

Metal

Clean the surface thoroughly, removing dirt and any loose paint. Before applying *Thermikoat Cool Roof*, prime metal surfaces with *Grip Primer* (see technical data sheet). If rust is present, treat the surface with a suitable anti-rust product before applying *Grip Primer*.

If the metal surface is painted, it is advisable to carry out a test to check the perfect adhesion of the system.

Wood

Thoroughly clean the surface by removing dust, brittle parts and loose flakes. The wood must be completely dry, well cohesive and dimensionally stable. On untreated wood surfaces proceed with direct application of the product. In other cases, carry out a preliminary test to check adhesion. On boards, matchboards or substrates with a high number of joints reinforce *Thermikoat Cool Roof* with a sandwich system (*Thermikoat Cool Roof + Polites TNT + Thermikoat Cool Roof*).

For supports not listed in the data sheet, please contact the Diasen technical department.



DIASEN SRL UNIPERSONALE - Società Benefit

Zona Industriale Berbentina 5 - 60041 Sassoferrato (AN) | Italia | +39 0732 9718
diasen@diasen.com | www.diasen.com | P.IVA 01553210426 | R.E.A. Ancona n. 150933
Reg. Imp. Ancona 01553210426 | Cap. Soc. €400.000,00 i.v.

THERMIKOAT COOL ROOF

Waterproofing and ultra-reflective, stagnation-resistant and cold-flexible coating

Treatment of joints and junctions

Expansion, control or insulation joints must be treated prior to application of *Thermikoat Cool Roof*. Joints should be filled with *Diaseal Strong* polyurethane sealant (see technical data sheet). In the wall-floor corner, a perimeter joint will be made with the same *Diaseal Strong* product. Once the sealant is completely dry, the joints should be waterproofed with *Safety Joint Roll* (see technical data sheet) impregnated with *Thermikoat Cool Roof*, applied with a brush, creating a pool effect. Contact points with door and window thresholds should also be treated with *Diaseal Strong* sealant.

MISCELAZIONE

Thermikoat Cool Roof is single-component and ready to use. In case of application by airless machine, dilute with maximum 10% clean water. Before applying, mix the product at low speed to avoid incorporating air until a homogeneous mixture is obtained. Never add foreign components to the mixture.

APPLICAZIONE

Apply the product *Thermikoat Cool Roof* in 2 or more layers.

1. Wait for the primer used to dry completely and apply a first coat with a short-haired or airless roller, ensuring full coverage of the surface. In case of rain on product that has not fully cured, carefully check suitability for subsequent coating.
2. When the first layer is dry (after about 5 hours at 23°C and 50% relative humidity), apply the next layer using the same system, taking care to cross the two layers to evenly cover the surface.

Thermikoat Cool Roof can be applied with **Graco TexSpray Mark V** airless machine. Dilute the product with 10 percent clean water, set the machine pressure to 150 bar and use nozzles 427 or 527.

DRYING TIME

At a temperature of 23°C and 50% relative humidity, the product dries completely in 5-7 hours.

- Drying times are affected by ambient relative humidity and temperature, and can vary significantly.
- If the product is applied in thick coats, drying times are significantly longer.
- Protect *Thermikoat Cool Roof* from contact with water and frost for at least 3 days after application at a temperature of 23°C and 50% relative humidity.
- When applied to metal substrates, *Thermikoat Cool Roof* dries more slowly.

SUGGESTIONS

- Do not apply at ambient and substrate temperatures below +5°C and above +30°C.
- During the summer season, apply during the coolest hours of the day, out of the sun.
- Do not apply with imminent danger of rain or frost, in heavy fog or with relative humidity above 70%.
- Protect the product from heavy rain until completely dry.
- Apply the product on completely dry surfaces.
- The product is not walkable; it can be walked on only for periodic maintenance.
- It is very important to provide appropriate expansion joints in the screed at regular intervals. Joints should be made in a workmanlike manner.
- Before applying the product, it is advisable to cover any elements that are not to be coated.

CLEANING

The equipment used can be washed with water before the product hardens.



DIASEN SRL UNIPERSONALE - Società Benefit

Zona Industriale Berbentina 5 - 60041 Sassoferrato (AN) | Italia | +39 0732 9718
diasen@diasen.com | www.diasen.com | P.IVA 01553210426 | R.E.A. Ancona n. 150933
Reg. Imp. Ancona 01553210426 | Cap. Soc. €400.000,00 i.v.

THERMIKOAT COOL ROOF

Waterproofing and ultra-reflective, stagnation-resistant and cold-flexible coating

SAFETY

During handling, use personal protective equipment and follow the product's safety data sheet.

* These data, although carried out according to standardised test methods, are indicative and may be subject to change as specific site conditions vary.

Dati fisici / tecnici*		
Features		Unità di misura
Yield	2,0 kg/m ²	kg/m ²
Aspect	Liquid	-
Colour	White	-
Dilution	Add max 10% water only for airless application	%
Application temperature	+5 /+35	°C
Waiting time between 1 st and 2 nd coat T=23°C; U.R. 50%	5	hours
Max humidity	70%	-
Drying time T=23°C; U.R. 50%	5 – 7	hours
Storage	12	months
Packaging	Plastic buckets	20 kg



DIASEN SRL UNIPERSONALE - Società Benefit
 Zona Industriale Berbentina 5 - 60041 Sassoferrato (AN) | Italia | +39 0732 9718
 diasen@diasen.com | www.diasen.com | P.IVA 01553210426 | R.E.A. Ancona n. 150933
 Reg. Imp. Ancona 01553210426 | Cap. Soc. €400.000,00 i.v.

The indications and prescriptions given, while representing our best experience and knowledge, are to be considered indicative and must be confirmed by exhaustive practical applications. Diasen does not know the specifics of the application and even less the determining characteristics of the application support. Therefore, before using the product, the applicator must in any case carry out preliminary tests to verify its perfect suitability for the intended use and, in any case, assume all responsibility that may arise from its use. In the event of any uncertainties or doubts, contact the company's technical office before starting work, it being understood that this support is merely an aid for the applicator, who must in any case guarantee that he/she possesses adequate skills and experience for laying the product and for identifying the most suitable solutions. Always refer to the latest updated version of the technical data sheet, available at www.diasen.com, which cancels and replaces all others.

THERMIKOAT COOL ROOF

Waterproofing and ultra-reflective, stagnation-resistant and cold-flexible coating

** 1680 of weathering test is equal to about 10 years. This equivalence is merely indicative and it may change depending on the climate and the place where the product is applied.

Final performances		Units	Regulations	Result
Reflection	> 90%	-	-	-
Thermal emission (E)	91%	-	ASTM C1371	-
Solar Reflex Index (SRI)	109%	-	ASTM E1980	-
Surface temperature difference between a bitumen sheathing and an <i>Thermikoat Cool Roof</i> covered	~48	°C	-	-
Temperature difference outside - inside	12	°C	UNI 10375 UNI EN ISO 13791 UNI EN ISO 13792	-
Adhesion on slightly damaged bitumen membrane	> 7,0	MPa = N/mm ²	UNI EN ISO 4624 ASTM D4541	Excellent
Adhesion on slated sheathing	4,3	MPa = N/mm ²	UNI EN ISO 4624 ASTM D4541	Excellent
Adhesion on galvanised sheet metal	1,7	MPa = N/mm ²	UNI EN ISO 4624 ASTM D4541	good
Adhesion on slate	2,5	MPa = N/mm ²	UNI EN ISO 4624 ASTM D4541	good
Adhesion on polyurethane (PU) panel	1,5	MPa = N/mm ²	UNI EN ISO 4624 ASTM D4541	good
Adhesion on plexiglass	2,0	MPa = N/mm ²	UNI EN ISO 4624 ASTM D4541	good
Waterproofing (positive pressure)	7,0	atm	UNI EN 8202/21	-
<i>Weathering Test</i> **	1680 (> 10 anni**)	ore	UNI EN ISO 11507	-
Resistance to 50 freeze-thaw cycles (-15°C/+15°C)	-	-	UNI EN 202	unchanged
<i>Break Elongation Test</i>	327%	-	ISO EN 527-3	-
Elongation at break after 3000 hours of accelerated ageing	166%	-	-	-
Direct tensile adhesion test on concrete	0,780	N/mm ²	UNI EN 1542	Type A/B breakage
Reaction to fire	classe B – s2, d0	-	UNI EN 13501-1	-
Resistance to stagnant water (9 months)	-	-	-	Very good
Flexibility (<i>Bend Test</i>)	12	mm	ISO 1519	-
Viscosity (Brookfield viscometer DV-E s04, 6 rpm, T= 20°C, R.H. 75%)	50000 - 65000	mPa · s	-	-

THERMIKOAT COOL ROOF

Waterproofing and ultra-reflective, stagnation-resistant and cold-flexible coating



fig.1a

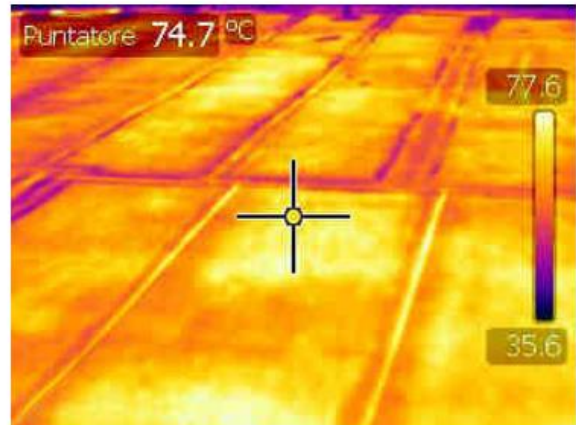


fig.1b

Situation before the intervention.

Images and temperatures taken with the thermal imaging camera (fig. 1 b)



fig.2a

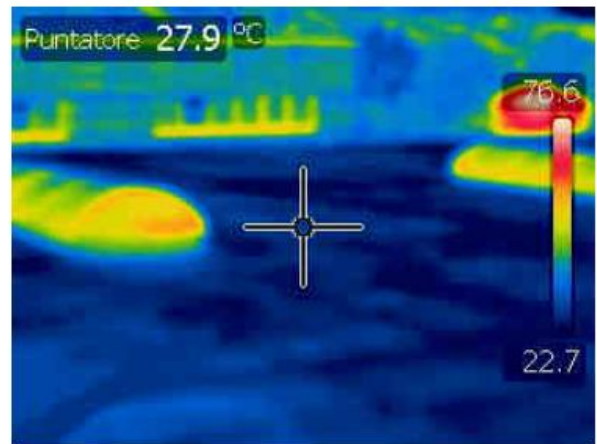


fig.2b

Situation after intervention with *Thermikoat Cool Roof*.

Images and temperatures taken with the thermal imaging camera (fig.2 b) – $\Delta T = 46,8^{\circ}\text{C}$.



DIASEN SRL UNIPERSONALE - Società Benefit

Zona Industriale Berbentina 5 - 60041 Sassoferrato (AN) | Italia | +39 0732 9718
 diasen@diasen.com | www.diasen.com | P.IVA 01553210426 | R.E.A. Ancona n. 150933
 Reg. Imp. Ancona 01553210426 | Cap. Soc. €400.000,00 i.v.

The indications and prescriptions given, while representing our best experience and knowledge, are to be considered indicative and must be confirmed by exhaustive practical applications. Diasen does not know the specifics of the application and even less the determining characteristics of the application support. Therefore, before using the product, the applicator must in any case carry out preliminary tests to verify its perfect suitability for the intended use and, in any case, assume all responsibility that may arise from its use. In the event of any uncertainties or doubts, contact the company's technical office before starting work, it being understood that this support is merely an aid for the applicator, who must in any case guarantee that he/she possesses adequate skills and experience for laying the product and for identifying the most suitable solutions. Always refer to the latest updated version of the technical data sheet, available at www.diasen.com, which cancels and replaces all others.